



Pharmacy Refrigerator

Pharmacy Refrigerator

The updated Haier Pharmacy refrigerator, more professional, more intelligent and more stable.




Technical Advantages


- Accurate temperature control technology to make the temperature maintain 2-8 °C and increment at 0.1°C
- Improved user interface with additional features include data USB port
- Oversized air-cooled condenser improves the robustness of the refrigeration system reliability and refrigeration efficiency

Ergonomic Design


- The new improved data storage management system is completed with a USB data port for downloading temperature data. Traceability of temperature performance is easily maintained
- Heated double-pane glass door allows a clear display of stored products without condensation at 32°C and 85% relative humidity condition
- LED interior light saves energy and provides bright lighting for viewing
- Drawers and shelves with optional label holders meet demands of product archiving and retrieving

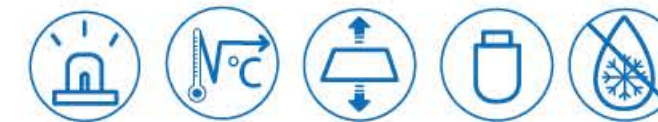

HYC-390 Warm-up test at 25°C ambient

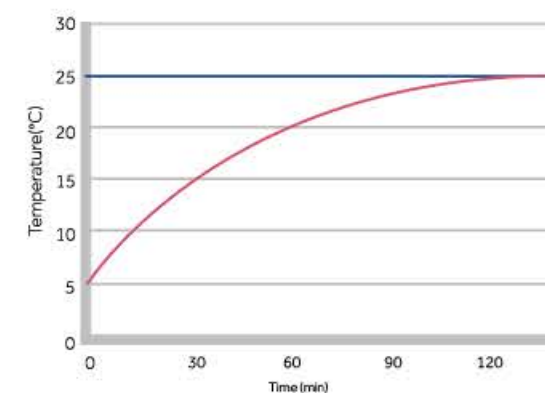

HYC-390 Pull down test at 25°C ambient

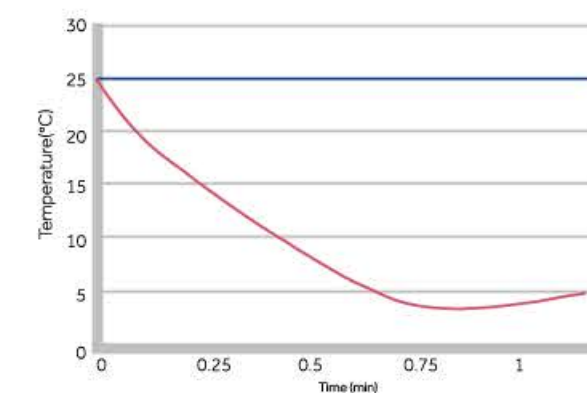

Pharmacy Refrigerator



Specification

	Model	HYC-68	HYC-68A	HYC-260	HYC-360	HYC-290	HYC-390	HYC-610	HYC-940	HYC-1378
Technical Data	Cabinet Type	Upright, foam door	Upright, glass door	Upright, single door	Upright, single door	Upright, single door	Upright, single door	Upright, single door	Upright, double door	Upright, double door
	Climate Class	N	N	N	N	N	N	ST	N	N
	Cooling Type	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling	Forced air cooling
	Deforst Mode	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
	Refrigerant	CFC-Free	CFC-Free	CFC-Free	CFC-Free	CFC-Free	CFC-Free	CFC-Free	CFC-Free	CFC-Free
Performance	Noise Level(dB)	30	30	44	43	43	43	45	42	43
Control	Temperature Range (°C)	2-8	2-8	2-8	2-8	2-8	2-8	2-8	2-8	2-8
	Controller	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor
Electrical Data	Display	LED	LED	LED	LED	LED	LED	LED	LED	LED
	Power Supply(V/Hz)	220~240/50	220~240/50 115/60	220~240/50 208~230/60 115/60	220~240/50 208~230/60	220~240/50 208~230/60	220~240/50 208~230/60	220~240/50 208~230/60 115/60	220~240/50	220~240/50
	Power(W)	84	84 84	340 340 340	430 430	340 340	380 380	490 560 560	900	800
	Electrical Current(A)	0.65	0.65 0.65	2.6 2.6 3.6	3.5 3.5	2.2 2.2	2.4 2.4	4 4 7.5	5.5	4.2
Dimensions	Capacity(L/Cu.Ft)	68/2.4	68/2.4	260/9.2	360/12.7	290/10.2	390/12.7	610/21.6	890/31.4	1378/48.7
	Net/Gross Weight(approx)	38/40(kg) 83.8/88.2(lbs)	38/40(kg) 83.8/88.2(lbs)	88/100(kg) 194.0/220.5(lbs)	99/114(kg) 218.3/251.3(lbs)	94/116(kg) 207.2/255.7(lbs)	106/130(kg) 233.7/286.6(lbs)	204/227(kg) 449.7/500.4(lbs)	227/279(kg) 500.4/615.1(lbs)	310/360(kg) 683.4/793.7(lbs)
	Interior Dimensions (W*D*H)	415*385*505(mm) 16.3*15.2*19.9(in)	415*385*505(mm) 16.3*15.2*19.9(in)	550*460*1065(mm) 21.7*18.1*41.9(in)	550*460*1340(mm) 21.7*18.1*52.8(in)	530*555*1080(mm) 20.9*21.9*42.5(in)	530*555*1380(mm) 20.9*21.9*54.3(in)	680*640*1400(mm) 26.8*25.2*55.1(in)	1030*590*1425(mm) 40.6*23.2*56.1(in)	1320*700*1500(mm) 52.0*27.6*59.1(in)
	Exterior Dimensions (W*D*H)	495*580*660(mm) 19.5*22.8*26.0(in)	495*580*660(mm) 19.5*22.8*26.0(in)	620*655*1720(mm) 24.4*25.8*67.7(in)	620*655*1995(mm) 24.4*25.8*77.0(in)	665*710*1665(mm) 26.2*28.0*65.6(in)	665*710*1965(mm) 26.2*28.0*77.4(in)	780*840*1945(mm) 30.7*33.1*76.6(in)	1130*755*1980(mm) 44.5*29.7*78.0(in)	1440*910*1980(mm) 56.7*35.8*78.0(in)
	Packing Dimensions (W*D*H)	522*620*690(mm) 20.6*24.4*27.2(in)	522*620*690(mm) 20.6*24.4*27.2(in)	700*715*1810(mm) 27.6*28.1*71.3(in)	700*715*2080(mm) 27.6*28.1*81.9(in)	735*800*1800(mm) 28.9*31.5*70.9(in)	735*800*2100(mm) 28.9*31.5*82.7(in)	875*937*2097(mm) 34.4*36.9*82.6(in)	1250*850*2130(mm) 49.2*33.5*83.9(in)	1600*1010*2100(mm) 63.0*39.8*82.7(in)
	Container load (20"/40"/40"H)	108/228/228	108/228/228	108/228/228	24/48/48	16/32/32	16/32/32	12/26/26	8/18/18	6/12/12
Functions	High/Low Temperature	Y	Y	Y	Y	Y	Y	Y	Y	Y
	Remote Alarm	N/A	N/A	Y	Y	Y	Y	Y	Y	Y
	Power Failure	N/A	N/A	Y	Y	Y	Y	Y	Y	Y
	Sensor Error	Y	Y	Y	Y	Y	Y	Y	Y	Y
	Low Battery	N/A	N/A	Y	Y	Y	Y	Y	Y	Y
	Door Ajar	Y	Y	Y	Y	Y	Y	Y	Y	Y
Accessories	Caster	N/A	N/A	Y	Y	Y	Y	Y	Y	Y
	Foot	Y	Y	Y	Y	Y	Y	Y	Y	Y
	Test Hole	N/A	N/A	N/A	N/A	Y	Y	N/A	N/A	N/A
	Shelves/Inner doors	2/-	2/-	4/-	5/-	4/-	6/-	6/-	12/-	12/-
	USB Interface	N/A	N/A	N/A	N/A	Y	Y	N/A	N/A	N/A
	Temperature Recorder	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Others	Certificate	CE	CE	CE	CE	/	/	/	CE	CE